




慈溪市万捷电子有限公司





CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD


REV.	DESCRIPTION	ECN No.	APPROVED	DATE

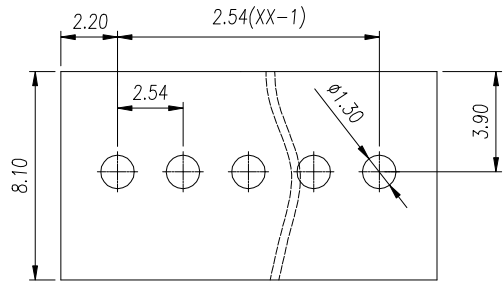

P.C.B. LAYOUT

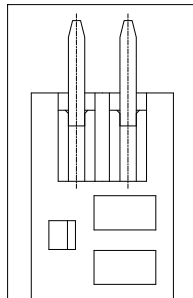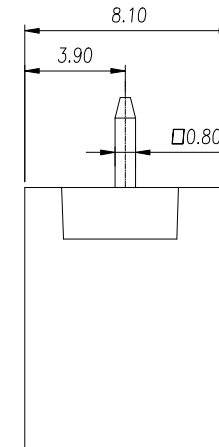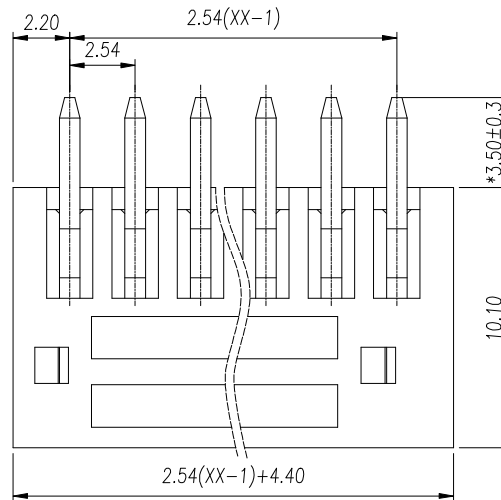

2P视图

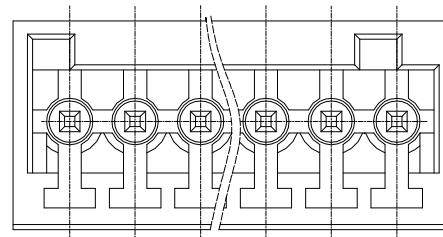

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UL/CUL 技术参数				
UL/CUL Technical Data				
等级 Use Group	B	C	D	
额定电压 Rated Voltage [V]	150	/	/	
额定电流 Rated Current [A]	5	/	/	
接线范围 Wire Range	/			
单/多芯线 Solid/Stranded [AWG]	/			
耐电压 Withstanding Voltage	1300V/1Min			
IEC 技术参数				
IEC Technical Data				
过电压类别 Overvoltage Category	III	III	II	
污染等级 Contamination Class	3	2	2	
额定电压 Rated Voltage [V]	80	160	320	
额定电流 Rated Current [A]	5	5	5	
额定冲击电压 Impulse withstand voltage [KV]	1.5	2.5	2.5	
导线截面积 Conductor cross section	/			
硬质/柔性导线 Solid/flexible [mm ²]	/			
材料 Material				
绝缘材料 Insulation Material	PA66			
阻燃等级 Imflammability	UL94V-0			
导体材料 Contactor Material	铜合金 Copper alloy			
导体表面镀层 Contactive Coating	镀锡 Sn Plated			
一般参数 Other Data				
间距 Pitch /极数 Poles [mm] / [P]	2.54 / 02-24			
剥线长度 Stripping Length [mm]	/			
螺丝 Screw/扭矩 Torque(Max) [N.m]	/			
工作温度 Operating temperature [°C]	-40~105			
引针尺寸 Pin Dimensions [mm]	0.8*0.8			
PCB板孔径 PCB Hole Diameter [mm]	Ø1.4			

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	4.5:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	WJ15EDGVC-2.54-XXP-1YY-00A	
						慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD		